

## PRODUCT DESCRIPTION

- Designed to reach an IP67 waterproof rating
- Small size
- Resistant to standard loads expected for floors

### FINISH :

Non anodized (raw) Silver anodized 

\*Custom colors available upon request



Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

## TECHNICAL SPECIFICATION

### Application

- waterproof, floor-mounted lighting fixtures in rooms briefly exposed to water (e.g. bathrooms)

### Assembly

- glued into the prepared gap between floor tiles (or wall tiles)
- the remaining gap is filled with grout

### Additional information

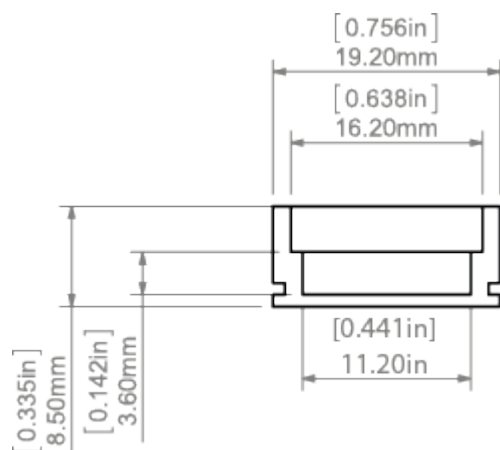
- the profile withstands the standard load resulting from pedestrian traffic, typical of domestic rooms

## AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
B1889NA_1	Non anodized (raw)	1000 mm
B1889NA_2	Non anodized (raw)	2000 mm
B1889NA_3	Non anodized (raw)	3000 mm
B1889ANODA_1	Silver anodized	1000 mm
B1889ANODA_2	Silver anodized	2000 mm



Ref. nr.	surface finish	available lengths
B1889ANODA_3	Silver anodized	3000 mm

## TECHNICAL DRAWING





**RELATED PRODUCTS**

## COVERS

HR-ALU frosted Cover  
Ref: 0945

## END CAPS

HR-ALU-OTW grey  
End cap  
Ref: 00347HR-ALU grey End  
cap  
Ref: 00010

## ACCESSORIES

8,8x1,2 Gland  
Ref: 00802

## MARKETING MATERIALS

Presentation set 1  
Ref: 90051