


# Profile KOPRO-30

Ref. A07890



## TECHNICAL DRAWING

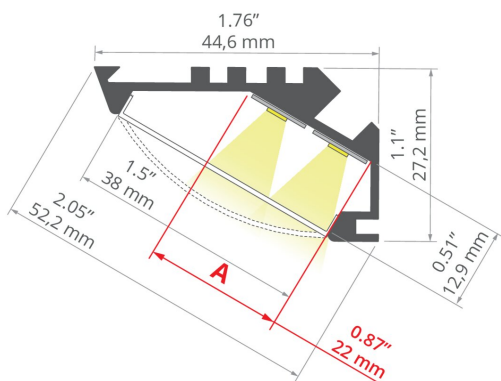

- Installation in corners
- Lighting angle: 30 Degrees
- Wide range of accessories
- Cable management space

## APPLICATION

- under-cabinet and functional lighting

## MOUNTING

- to the surface, using dedicated accessories, mounting adhesive or properly selected screws
- can be easily connected into runs and systems

## ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver anodized
Possible fixture IP	20
Possible fixture shapes	linear, polygonal
Profile cross-section	angled
Width	44.6 mm
Height	27.2 mm
LED gluing width A	22 mm
Number of LED strips A (8 mm wide)	2
Width of the glow	38 mm
Max power of a single KLUŚ LED strip	24 W/m
Lighting at an angle	30
Possibility of obtaining a line of light	yes
Building type	Commercial, Retail, Entertainment/ Arts
Facility zone	kitchen, furniture, shop windows and exhibition
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Wire out back of extrusion	yes

Length	Ref
1000 mm	A07890A_1
2005 mm	A07890A_2
3010 mm	A07890A_3

## SAMPLE PROJECTS



## RELATED ACCESSORIES > COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
KOPRO	PC	69 %	satin	B170915

## RELATED ACCESSORIES > END CAPS


NAME	MATERIAL	COLOR	REF.
KOPRO-30-L-P	PP	gray	C24172C02
		silver	C24172L01
KOPRO-30-L-L	PP	gray	C24173C02
		silver	C24173L01
KOPRO-30-P-P	PP	gray	C24174C02
		silver	C24174L01
KOPRO-30-P-L	PP	gray	C24175C02
		silver	C24175L01

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM




**K-27T50-1440-24**  
K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > BENDABLE



**K-BTRGB40-1510-24**  
K-BTRGB40-1510-24

RELATED ACCESSORIES > RELATED LED > CRI 95+



**K-CR-0480-24**  
K-CR-0480-24




**K-CR-0960-24**  
K-CR-0960-24




**K-CR-1440-24**  
K-CR-1440-24


RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

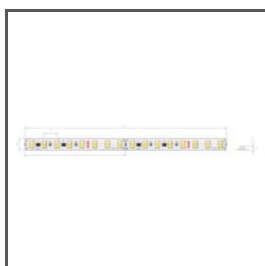


**K-HE-0480-HD-24**  
K-HEHD-0480-24



**K-HE-0960-HD-24**  
K-HEHD-0960-24




**K-HE-1440-HD-24**  
K-HEHD-1440-24

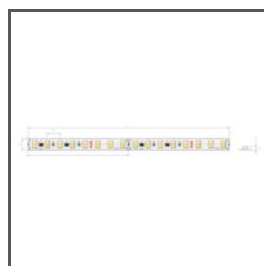

**K-HE-1920-HD-24**  
K-HEHD-1920-24



**K-VHE-0480-24**  
K-VHE-0480-24




**K-VHE-0960-24**  
K-VHE-0960-24



**K-VHE-1440-24**  
K-VHE-1440-24

## RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT



**K-RGBW-1530-24**  
K-RGBW-1530-24




**K-1920-120-RGB-24**  
K-RGB-1920-120-24



**K-RGB-1200-24**  
K-RGB-1200-24




**K-RGB-0700-24**  
K-RGB-0700-24

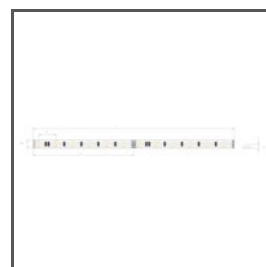


**K-RGB-1560-24**  
K-RGB-1560-24

## RELATED ACCESSORIES > RELATED LED > WHITE MONO

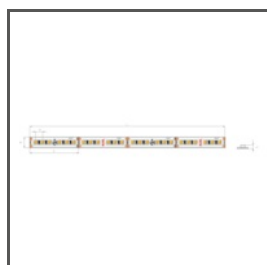


**K-1275-24**  
K-1275-24



**K-1910-HD-24**  
K-HD-1910-24




**K-0530-HD-24**  
K-HD-0530-24

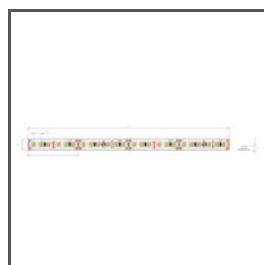


**K-1220-24**  
K-1220-24



**K-2300-24**  
K-2300-24



**K-0480-24**  
K-0480-24




**K-0960-24**  
K-0960-24



**K-1440-24**  
K-1440-24




**K-2400-24**  
K-2400-24



**K2-1920-24**  
K2-1920-24



**K3-2880-24**  
K3-2880-24



**K-HD-0480-24**  
K-HD-0480-24



**K-HD-0960-24**  
K-HD-0960-24




**K-HD-1440-24**  
K-HD-1440-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS



CONNECTOR  
**ZM-120**  
42728



CONNECTOR  
**ZM-120-G**  
42308



CONNECTOR  
**ZM-60**  
C28243N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ISOLATING BASES



ISOLATING BASES  
**FI-6**  
C28109C00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER



GLAND  
**6,4x3**  
C42264C07