



Profile KOZUS-50

Ref. A00958

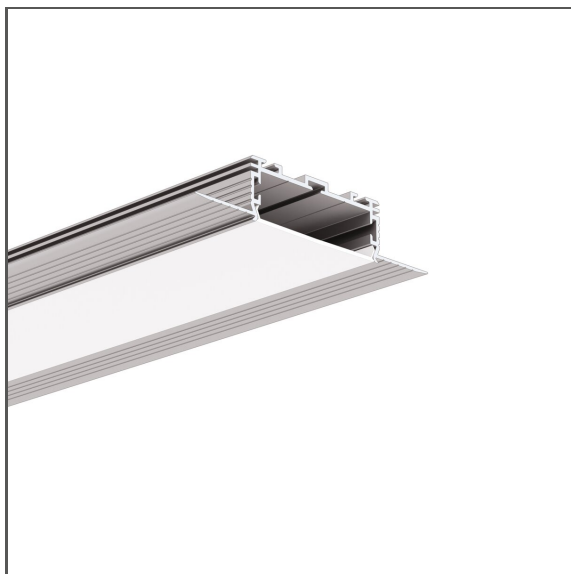

- Mounting to 16 mm | 0.63" drywall
- No collision with the ceiling structure
- Line of light flush with the surface
- High lumen output
- Non visible aluminum elements
- Possibility to mount the power supply in the luminous part of the luminaire

APPLICATION

- main and decorative lighting

MOUNTING


- in drywall, with mounting adhesive
- can be easily connected into runs and systems

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-50 protective insert should be used

TECHNICAL DRAWING

1:2

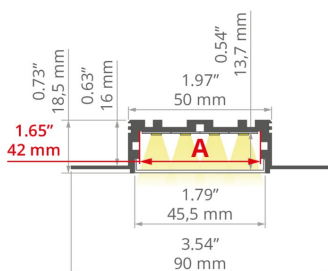

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver non anodized
Possible fixture IP	20, 65
Possible fixture shapes	linear, polygonal
Profile cross-section	rectangular
Width	90 mm
Height	18.5 mm
LED gluing width A	42 mm
Number of LED strips A (8 mm wide)	5
Width of the glow	44.6 mm
Max power of a single KLUŚ LED strip	24 W/m
Possibility of obtaining a line of light	yes
Building type	Commercial, HoReCa object, Retail
Facility zone	communication routes and corridors, bathroom, lobby / foyer, office, conference room
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes


Length	Ref
1000 mm	A00958N_1
2005 mm	A00958N_2
3010 mm	A00958N_3

Profile KOZUS-50


Ref. A00958

Mounting to drywall	yes
To cover with plaster	yes
Wire out back of extrusion	yes

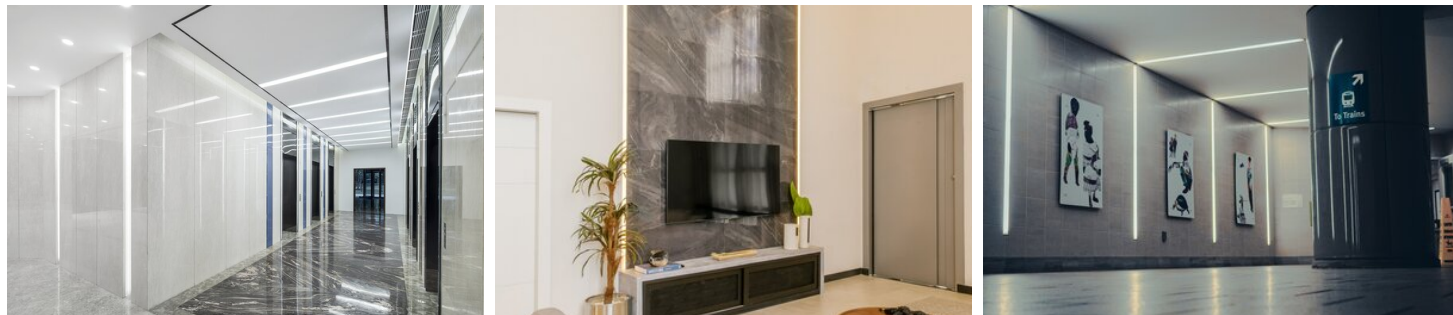

SAMPLE PROJECTS



RELATED ACCESSORIES > COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
LIGER		64 %	satin	B17086S
		66 %	B17086MOP	
		22 %	black	B17086B

RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
KOZUS-50	 PP	 gray	C24282C02

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM



K-27T50-1440-24
K-27T50-1440-24



KWP-27T50-1440-24
KWP-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > CRI 95+




K-CR-0480-24
K-CR-0480-24



K-CR-0960-24
K-CR-0960-24



K-CR-1440-24
K-CR-1440-24



KWP-CRHD-1820-24
KWP-CRHD-1820-24



KWP-CRHD-1910-24
KWP-CRHD-1910-24




KWP-CR-0480-24
KWP-CR-0480-24




KWP-CR-0960-24
KWP-CR-0960-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

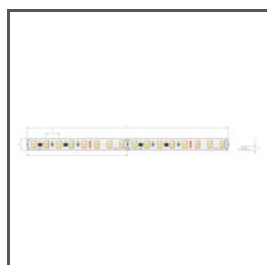


K-HE-0480-HD-24
K-HEHD-0480-24



K-HE-0960-HD-24
K-HEHD-0960-24



K-HE-1440-HD-24
K-HEHD-1440-24

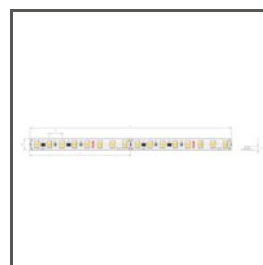

K-HE-1920-HD-24
K-HEHD-1920-24



K-VHE-0480-24
K-VHE-0480-24



K-VHE-0960-24
K-VHE-0960-24



K-VHE-1440-24
K-VHE-1440-24

RELATED ACCESSORIES > RELATED LED > SIDE EMITTING




KWP-SE-1210-24-8
KWP-SE-1210-24-8


RELATED ACCESSORIES > RELATED LED > WHITE MONO




K-0530-HD-24
K-HD-0530-24



K-1220-24
K-1220-24



K-1275-24
K-1275-24




K-1910-HD-24
K-HD-1910-24




K-2300-24
K-2300-24



K-0960-24
K-0960-24



K-1440-24
K-1440-24



K-0480-24
K-0480-24




K-2400-24
K-2400-24



K-HD-0480-24
K-HD-0480-24




K-HD-0960-24
K-HD-0960-24



K-HD-1440-24
K-HD-1440-24



KWP-1220-24
KWP-1220-24




KWP-1275-24
KWP-1275-24




KWP-HD-1910-24
KWP-HD-1910-24




KWP-GHD-1910-24
KWP-GHD-1910-24



KWP-1440-24
KWP-1440-24



KWP-0480-24
KWP-0480-24



KWP-0960-24
KWP-0960-24



KWP-GHD-0480-24
KWP-GHD-0480-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS




CONNECTOR
ZM-NA-90
42723



CONNECTOR
ZM-NA-120
C28242N00



CONNECTOR
ZM-NA-PION-135
42727



CONNECTOR
ZM-NA-PION-120
42321

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER




GLAND
6,4x3
C42264C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > PROFILE MASKING COVERS



MASKING COVER
MP-50
C28263L01_1, C28263L10_1,
C28263L07_1

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS



PROTECTIVE INSERT
TECH-50
C24532C02