

Profile STEKO

Ref. A18018

Ref. arch 18018



- For installation on the steps
- Non-slip elements

APPLICATION

- warning lighting and anti-slip protection on the steps


MOUNTING

- to a step, using properly selected screws

ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

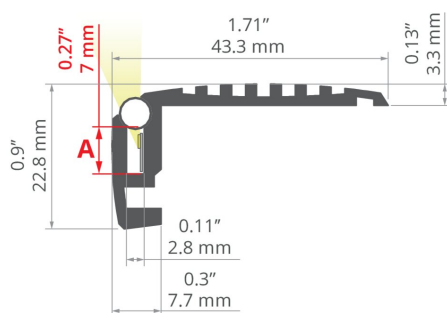

TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20
Possible fixture shapes	linear
Width	43.3 mm
Height	22.8 mm
LED gluing width A	7 mm
Building type	Commercial, Entertainment/ Arts, HoReCa object
Facility zone	stairs and handrails
Wire out back of extrusion	yes

Color	Length	Ref
■ silver anodized	1000 mm	A18018A_1 18018ANODA_1
	2005 mm	A18018A_2 18018ANODA_2
	3010 mm	A18018A_3 18018ANODA_3
■ black anodized	1000 mm	A18018A07_1 18018K7_1
	2005 mm	A18018A07_2 18018K7_2
	3010 mm	A18018A07_3 18018K7_3

Profile STEKO

Ref. A18018

Ref. arch 18018

SAMPLE PROJECTS



RELATED ACCESSORIES > RELATED END CAPS

NAME		MATERIAL	COLOR	REF.
STEKO-90		PP	gray	C24053C02 24053
STEKO-P		PP	gray	C24037C02 24037
			black	C24037C07 24247
STEKO-L		PP	gray	C24038C02 24038
			black	C24038C07 24246

RELATED ACCESSORIES > RELATED LED > SIDE EMITTING



K-SE-0480-24

K-SE-0480-24

Ref. arch K-SE-0480-24

Profile STEKO

Ref. A18018

Ref. arch 18018

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER



GLAND

6x1,2

C24517C07

Ref. arch 00802

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SILICONE CORDS



ANTI-SLIP RUBBER STRIP

FI-5

C24538C00

Ref. arch 17002